

CREVIS

FnIO G - Series

Get Smart Things for Industrial Automation



www.crevis.co.kr

Network Adapter

GN/GL-9xxx

MODBUS TCP, EtherNet IP, PROFINET, EtherCAT, CC-Link IE, CC-Link IE Field Basic, PROFIBUS, MODBUS RS485, CC-Link, DeviceNet, CANopen, BACnet, MODBUS RTU

PIO

GN/GL-9xxx
MODBUS
EtherCAT

Digital Input

GT-1xxx

- DC : 8, 16, 32 ch
- Diagnostic :
In(Sink)+Out(Source)
- AC : 4 ch

Digital Output

GT-2xxx


- Sink : 8, 16, 32 ch
- Source : 8, 16, 32 ch
- Diagnostic : sink, source
- Relay

Various types of protocols
Over 10 protocols available

Wide range of modules
More than 90 different I/Os

Fast Internal Bus
<1ms (128 Bytes)

Operating Temp
-20 to 60°C (UL)
-40 to 70°C

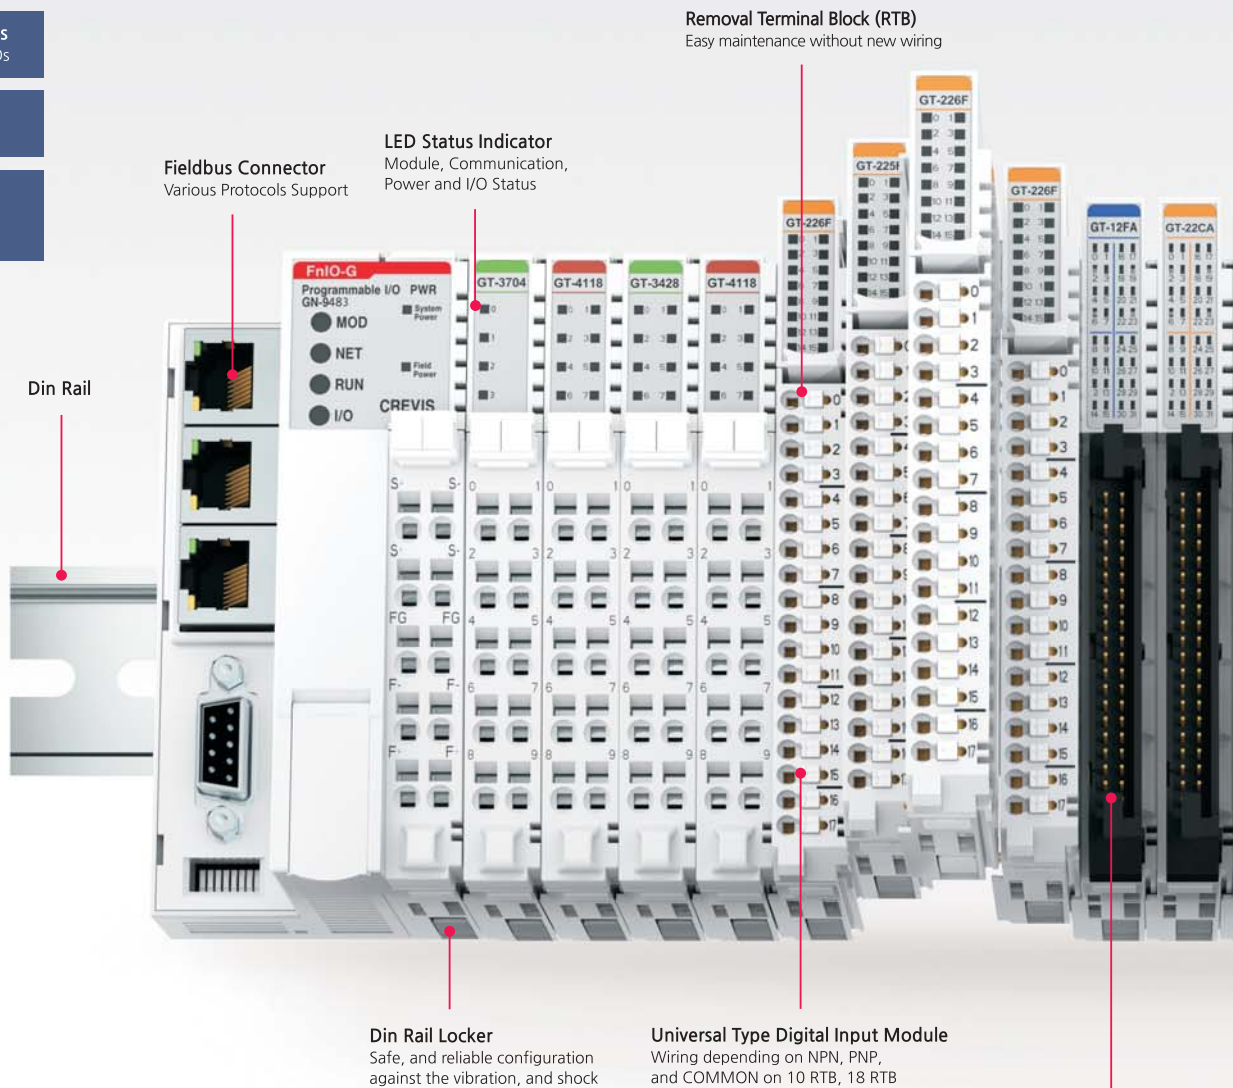

Removal Terminal Block (RTB)
Easy maintenance without new wiring

Fieldbus Connector
Various Protocols Support

LED Status Indicator
Module, Communication,
Power and I/O Status

Din Rail

Din Rail Locker
Safe, and reliable configuration
against the vibration, and shock

Universal Type Digital Input Module
Wiring depending on NPN, PNP,
and COMMON on 10 RTB, 18 RTB

World's First : Compact Size
I/O module for 32 Points

■ Analog Input

GT-3xxx

- Single Ended (Current): 4, 8, 16 ch
- Single Ended (Voltage): 4, 8, 16 ch
- Differential (Current/Voltage): 4, 8 ch
- Temperature Module (RTD/T.C.): 4, 8 ch
- Temp. Controller (RTD/T.C.): 4 ch
- AC Measurement
- Load cell

■ Analog Output

GT-4xxx

- Single Ended (Current): 4, 8 ch
- Single Ended (Voltage): 4, 8, 16 ch

■ Special Module


GT-5xxx

- Encoder
- Serial Interface
- Pulse
- Stepper
- HART

■ Power Module

GT-7xxx

- Shield
- Common: 0, 24 Vdc
- Expansion
- Field Power Distribution
- Noise Filter

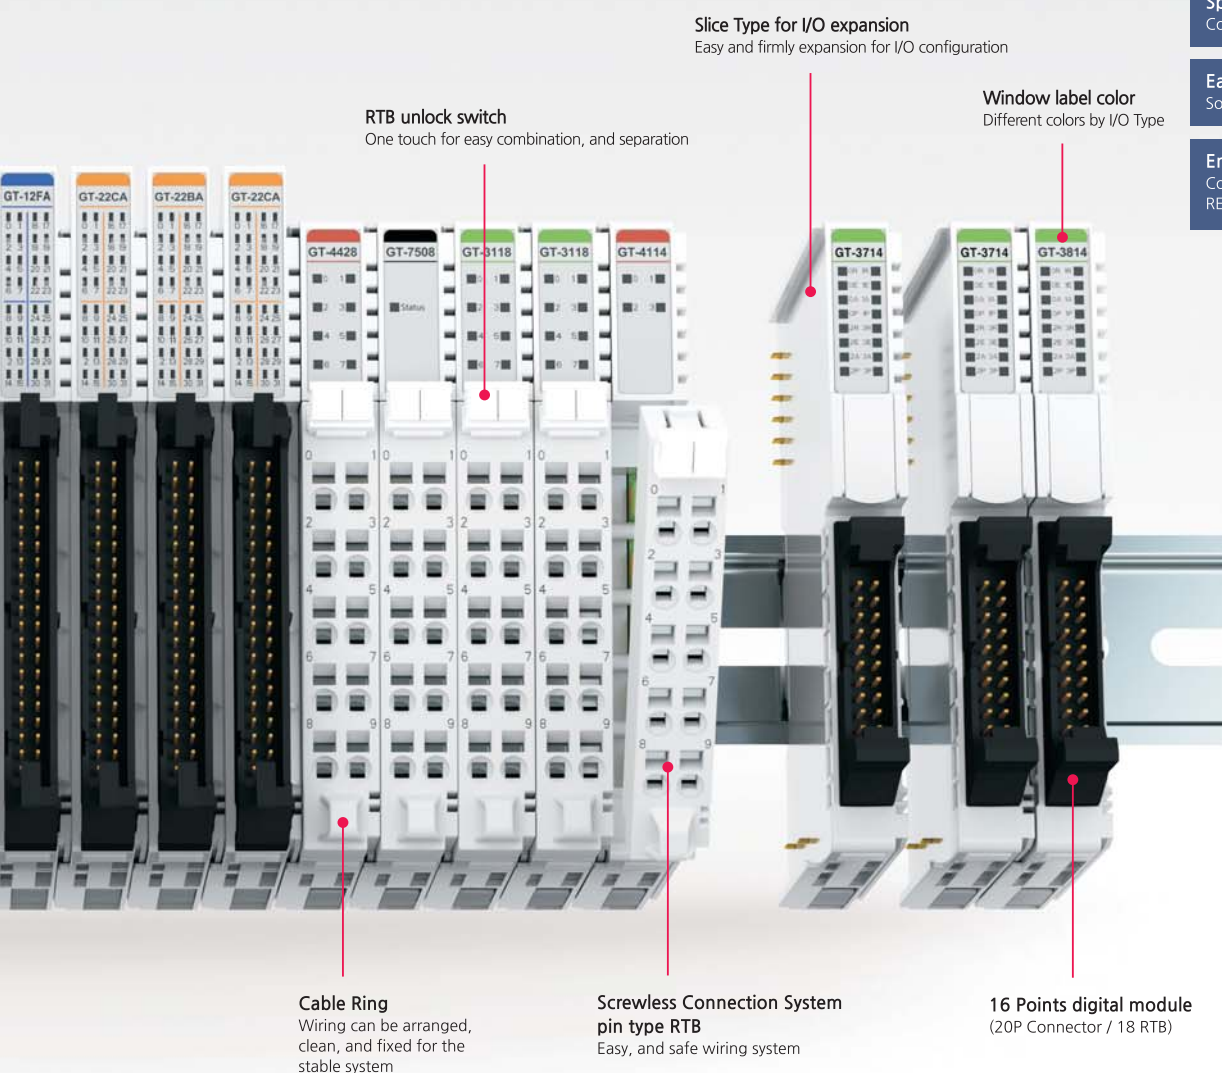

RTB unlock switch

One touch for easy combination, and separation

Slice Type for I/O expansion

Easy and firmly expansion for I/O configuration

Window label color

Different colors by I/O Type

Cable Ring

Wiring can be arranged, clean, and fixed for the stable system

Screwless Connection System pin type RTB

Easy, and safe wiring system

16 Points digital module (20P Connector / 18 RTB)

Easy Maintenance

User Friendly Design

Space-Saving

Compact Size & Expandable Modules

Easy Configuration

Software 'I/O Guide Pro'

Environmental Compliance

Complying with RoHS3, China RoHS, REACH and WEEE

I/O Guide Pro

To help users' I/O configuration


Simple Software Tool for User Convenience

Simulation

Enable to review configuration without modules via I/O Guide Pro
Dimension, Power Consumption, Possibility of expansion

Manual and Project Viewer

Provide the product information as the manual
Enable to export the User-configured project files in Excel or PDF file formats

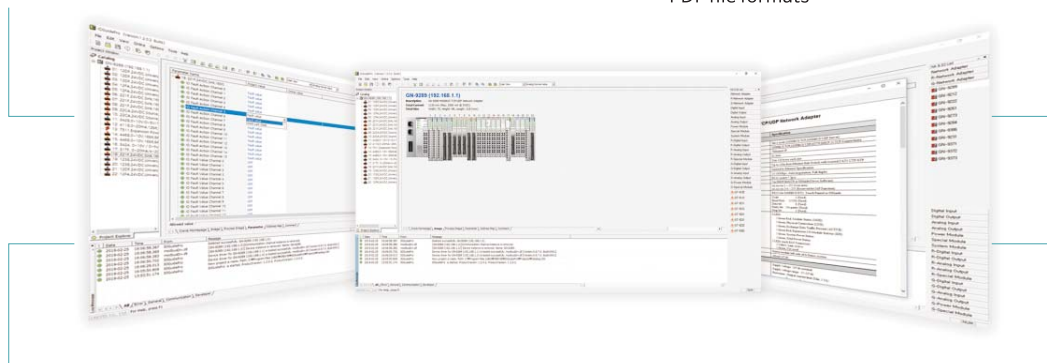


Parameter setting and View Address Map

Enable to change parameters of modules easily
Displaying input/output address map

BOOTP Server and Automatic Scan

IP setting and connecting communication online without a master
* Online - MODBUS protocol available

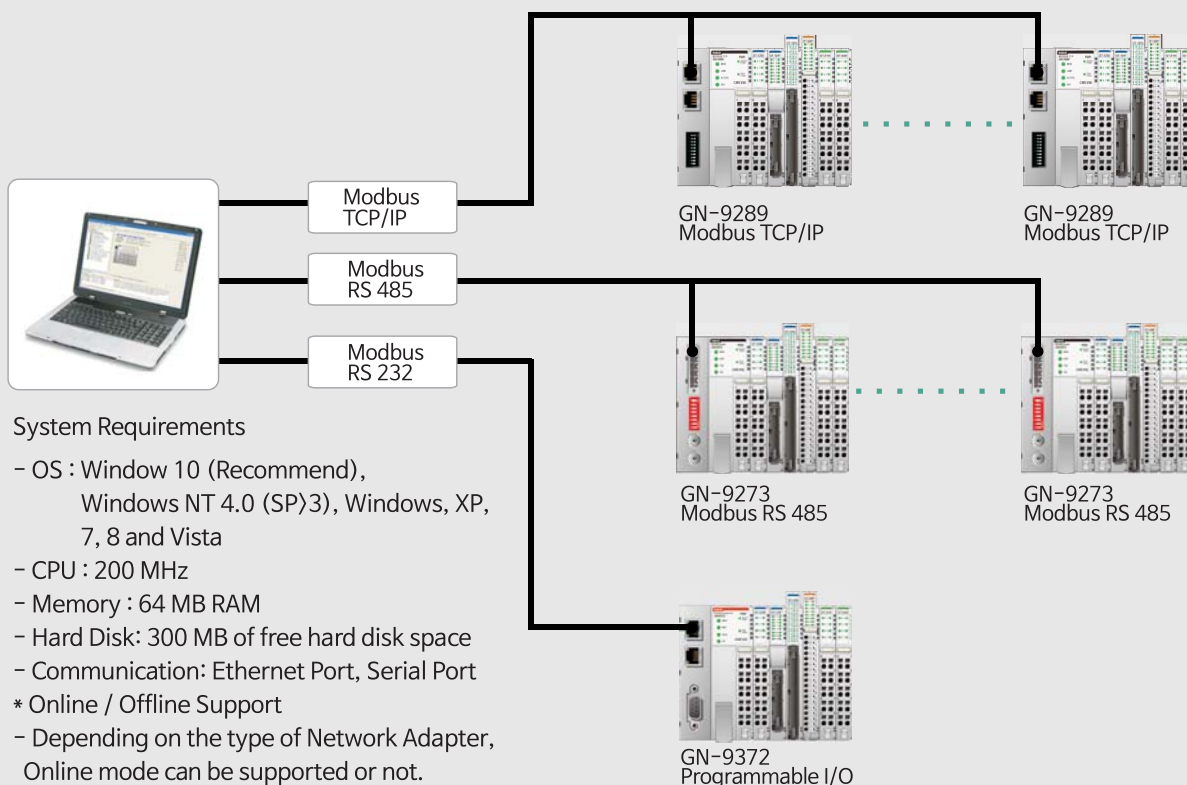

NEW

Programmable I/O (Raspberry pi)



Programmable I/O	GL-9981	GL-9982
Programming	Type1 : CODESYS ABL License Type2 : C/C++ based on Linux	
CPU	ARM Cortex-A72 @ 1GHz	
Flash Memory / RAM	16GB / 2GB	
OS	Linux	
Max. I/O Expansion	63 Slots	
I/O Data Size	Max 128 Bytes (each slots)	
Ethernet Baudrate	100Mbps, Auto-negotiation, Full Duplex	
Interface	RJ-45 Socket * 1pcs USB 2.0 Port * 2pcs	RJ-45 Socket * 2pcs USB 3.0 Port * 2pcs USB C Type Port * 1pcs
System Power	24Vdc nominal (15~28.8Vdc)	
Field Power	24Vdc typical (Max. 28.8Vdc)	
Power Connector	5 Pin Open Connector	
Dimensions	22.5mm x 109mm x 70mm	



Embedded Type PLC

- ▶ Embedded Type Controller
- ▶ Quad core Cortex-A72 (ARM v8)
64-bit SoC @ 1.5GHz
- ▶ Basic Control with Linux
- ▶ Supporting CODESYS ABL Type License
- ▶ Best Solution for IIOT


NEW

Programmable I/O (EtherCAT/MODBUS)



Programmable I/O (CODESYS Version 3.5.17.3)		GN-9481	GN-9482	GN-9483
Memory	Program Memory	512 Kbytes	16 Mbytes	
	Data Memory	96 Kbytes	16 Mbytes	
	Non Volatile Memory	4 Kbytes	32 Kbytes	
Program Languages / Run Time System / RTC		IEC 61131-3 (LD, IL, ST, FBD, SFC, CFC) / Multiple PLC Tasks / Retain Time : 15 days		
Protocol		EtherCAT Protocol / Ethernet Protocol (Modbus/TCP, Modbus/UDP), SNTP HTTP (Webvisualization, Web-Server), DHCP/BOOTP / Serial Protocol (Modbus RTU), MQTT, SQL, SNMP		
OPC Server (DA/UA) TFTP, Online Change, Breakpoint, Source Up/Download, File Transmit		Not supporting	supporting	
Webvisualization		Not Supporting		supporting
Process Time		1usec (90 Instructions)	7usec (90 Instructions)	
Max. Task / Max. Cycle Task / Max. Status Task		10		
Controller Type *(Master, Slave)		Modbus TCP/UDP, Modbus RTU *(Master/Slave) EtherCAT *(Slave)		
Max. Node / Max. I/O Expansion / I/O Data Size		Limited by EtherCAT / Ethernet specification / 63 Slots / Max 128 Byte each slot		
Baud Rate		Ethernet (10/100 Mbps) / EtherCAT (100 Mbps) / Modbus RTU (2400~115200 bps)		
Connector Type		3 x RJ-45		
System & Field Power / Power Dissipation / Current for IO Module		Supply voltage : 24Vdc (15~30Vdc) / 75mA typical @ 24Vdc / 1.5A @5Vdc		
Dimensions		54mm x 99mm x 70mm		

CODESYS PLC



Supporting CODESYS V3
Monitoring, and controlling on the web browser via the
web visualization feature of CODESYS

Supporting the programming languages like LD, FBD,
IL, ST, SFC, CFC based on IEC 61131-3

MODBUS TCP/IP



NEW



Supporting MODBUS TCP master or slave type
Supporting MODBUS RTU master or slave type
Connecting other industrial devices via an OPC server

Programmable I/O (MODBUS)



Programmable I/O (CODESYS Version 3.5.17.3)		GN-9371	GN-9372	GN-9373
Memory	Program Memory	512 Kbytes	16 Mbytes	
	Data Memory	96 Kbytes	16 Mbytes	
	Non Volatile Memory	4 Kbytes	12 Kbytes	
Program Languages / Run Time System / RTC		IEC 61131-3 (LD, IL, ST, FBD, SFC, CFC) / Multiple PLC Tasks / Retain Time : 15 days		
Protocol		Ethernet Protocol (Modbus/TCP, Modbus/UDP), SNTP HTTP (Webvisualization, Web-Server), DHCP/BOOTP / Serial Protocol (Modbus RTU) / MQTT, SQL, SNMP		
OPC Server (DA/UA), TFTP, Online Change, Breakpoint, Source Up/Download, File Transmit		Not supporting	supporting	
Webvisualization		Not Supporting		supporting
Process Time		1usec (90 Instructions)	7usec (90 Instructions)	
Max. Task / Max. Cycle Task / Max. Status Task		10		
Controller Type *(Master, Slave)		Modbus TCP/UDP Modbus RTU *(Master/Slave)		
Max. Node / Max. I/O Expansion / I/O Data Size		Limited by EtherCAT/Ethernet specification / 63 Slots (GN-937X), 10 Slots (GL-9971) / Max 128Byte each slot		
Baud Rate		Ethernet (10/100 Mbps) / Modbus RTU (2400~115200 bps)		
Connector Type		2 x RJ-45		
System Power		Supply voltage : 24Vdc nominal (GL-9971 :15 ~28.8 Vdc / GN-937x : 15 ~ 30 Vdc)		
Field Power		Supply voltage : 24Vdc typical (Max. 30Vdc)		
Power Dissipation / Current for I/O Module		110mA typical @ 24Vdc / 1.5A@5Vdc		
Dimensions		54mm x 99mm x 70mm		

Programmable I/O (CODESYS Version 3.5.17.3)		GL-9971	GL-9972	GL-9973	GL-9974	GL-9975
Memory	Program Memory	256 Kbytes	16 Mbytes			
	Data Memory	40 Kbytes	16 Mbytes			
	Non Volatile Memory	4 Kbytes	32 Kbytes			
Program Languages / Run Time System / RTC		IEC 61131-3 (LD, IL, ST, FBD, SFC) / Multiple PLC Tasks / Retain Time : 15 days				
Protocol		Ethernet Protocol (Modbus/TCP, Modbus/UDP) , SNTP HTTP (Web-Server) , DHCP/BOOTP				
OPC Server (DA/UA) , TFTP, Online Change, Breakpoint, Source Up/Download, File Transmit		Not supporting	supporting			
Webvisualization		Not Supporting		Supporting	Not Supporting	Supporting
Process Time		0.0270us	0.1440usec			
Max. Task / Max. Cycle Task / Max. Status Task		10				
Controller Type *(Master, Slave)		Modbus TCP *(Master/Slave)	Modbus TCP/UDP Modbus RTU *(Master/Slave)			
Max. Node / Max. I/O Expansion / I/O Data Size		Limited by EtherCAT/Ethernet specification / 10 Slots / Max 128Byte each slot				
Baud Rate		Ethernet (10/100 Mbps)	Ethernet (10/100 Mbps) / Modbus RTU (2400~115200 bps)		Ethernet (10/100 Mbps)	
Connector Type		2 x RJ-45				
System Power		Supply voltage: 24Vdc nominal Supply voltage range: 18 ~ 28.8Vdc Reverse polarity protection				
Field Power		Supply voltage : 24Vdc typical (Max. 30Vdc)				
Power Dissipation / Current for I/O Module		60mA typical @ 24Vdc	50mA typical @ 24Vdc		70mA typical @ 24Vdc	
Dimensions		22mm x 109mm x 70mm				

Network Adapter

Network Adapter	GN-9212(GN-9211)	GN-9222	GN-9261	GN-9273	GN-9231	GN-9284
Protocol	DeviceNet	PROFIBUS	CANopen	MODBUS RS485	CC-Link	CC-Link IE Field Basic
Max. Node	64 Nodes	125 Nodes	99 Nodes		42 Nodes	64 Nodes
Max. I/O Expansion	63 Slots (32 Slots)	63 Slots	63 Slots	63 Slots	63 Slots	32 Slots
I/O Data Size	Max 128 bytes each slot	Input : 244 bytes Output : 244 bytes	Input : 252 bytes Output : 252 bytes	Max 128 bytes each slot	System area : 16 Point RX/RX : 112 points (4 Station occupied) RWr/RWw : 16 points (4 Station occupied)	RX/RX : 32 bytes each (4 Station occupied) RWr/RWw : 256 bytes each (4 Station occupied)
Baud Rate	125Kbps (Max. 500m) 250Kbps (Max. 250m) 500Kbps (Max. 100m)	9.6K(1.2Km) ~ 12Mbps(100m)	10, 20, 50, 100, 125, 250, 500, 800, 1000 Kbps (default 1000Kbps)	1200, 2400, 4800, 9600, 19200, 38400, 57600, 115200bps	156/625/2500/5000 /10000 Kbps	10/100 Mbps, Full duplex
Connector Type	5 Pin Open-Style	9 Pin D-Sub	5 Pin Open-Style			2 x RJ-45
Power Dissipation	70mA @ 24Vdc	100mA @ 24Vdc	70mA @ 24Vdc			
Protection	Min. 1.5A					
Current for I/O Module	1.5A @ 5Vdc					
System/ Field Power	24Vdc nominal (15~30Vdc) / 24Vdc typical (Max. 30Vdc) * Field Power Range is different depending on IO Module series. Refer to I/O Module's Specification					
Dimensions	54mm x 99mm x 70mm					

Network Adapter	GN-9285	GN-9386	GN-9287	GN-9587	GN-9289	GN-9251
Protocol	CC-Link IE	EtherCAT (ID Type)	PROFINET, Modbus RTU	PROFINET, Modbus RTU, DCP-Hello	MODBUS TCP, Ethernet IP	BACnet/IP B-ASC
Max. Node	120 Nodes	65,535 Nodes	Limited by Profinet Spec.		Limited by Ethernet Spec.	
Max. I/O Expansion	63 Slots		32 Slots		63 Slots	32 Slots
I/O Data Size	Max 128 bytes each slot		Max 1440 bytes	Max 1024 bytes	Max 128 bytes each slot	Object Size : Max. 256 objects
Baud Rate	1 Gbps, Full duplex	100 Mbps	100 Mbps, Full duplex		10/100 Mbps, Full duplex	
Connector Type	2 x RJ-45					
Power Dissipation	140mA @ 24Vdc	70mA @ 24Vdc		80mA @ 24Vdc	70mA @ 24Vdc	
Protection	Min. 1.5A					
Current for I/O Module	1.5A @ 5Vdc					
System/ Field Power	24Vdc nominal (15~30Vdc) / 24Vdc typical (Max. 30Vdc) * Field Power Range is different depending on IO Module series. Refer to I/O Module's Specification					
Dimensions	54mm x 99mm x 70mm					

Network Adapter	GL-9089	GL-9087	GL-9084	GL-9073	GL-9086
Protocol	MODBUS TCP, Ethernet IP	PROFINET	CC-Link IE Field Basic	MODBUS RTU	EtherCAT
Max. Node	Limited by Ethernet Spec.		64 Nodes	99 Nodes	65,535 Nodes
Max. I/O Expansion	16 Slots	10 Slots	16 Slots		
I/O Data Size	Max 256 bytes	Max 128 bytes	Max 256 bytes		
Baud Rate	10/100Mbps, Full duplex	100Mbps, Full duplex	10/100Mbps, Full duplex	2400, 4800, 9600, 19200, 38400, 57600, 115200bps	10/100Mbps
Connector Type	2 x RJ-45				
Power Dissipation	75mA typical @ 24Vdc	55mA typical @ 24Vdc	60mA typical @ 24Vdc	75mA typical @ 24Vdc	40mA typical @ 24Vdc
Protection	Reverse polarity protection				
Current for I/O	1A @ 5Vdc				
System/ Field Power	24Vdc nominal (15~28.8Vdc) / 24Vdc typical (Max. 28.8Vdc) *Field Power Range is different depending on IO Module series. Refer to I/O Module's Specification				
Dimensions	22mm x 109mm x 70mm				

* **Caution** – System Power and Field Power must be separated.

* **Note** – Product specifications, terms and offerings are subject to change without notice.

Network Adapter

Network Adapter	GL-9012	GL-9031	GL-9131	GL-9132
Protocol	DeviceNet	CC-LINK	CC-LINK	CC-LINK Ver 2
Max. Node	64 Nodes	42 Nodes	42 Nodes	42 Nodes
Max. I/O Expansion	10 Slots	12 Slots	12 Slots	32 Slots
I/O Data Size	Max Input 36 bytes / Max Output 36 bytes	System area : 16 Point RX/RX : 112 points (4 Station occupied) RWr/RWw : 16 points (4 Station occupied)	System area : 16 Point RX/RX : 112 points (4 Station occupied) RWr/RWw : 16 points (4 Station occupied)	According to CC-Link version 2 specification
Baud Rate	500 Kbps to 125 Kbps	156/625/2500 /5000/10000Kbps	156/625/2500 /5000/10000Kbps	156/625/2500 /5000/10000Kbps
Connector Type	5 Pin Open-Style			
Power Dissipation	20mA @ 24Vdc	35mA typical @ 24Vdc	70mA typical @ 24Vdc	70mA typical @ 24Vdc
Protection	Reverse polarity protection			
Current for I/O Module	1.0A @ 5Vdc			
System/ Field Power	24Vdc nominal			
Dimensions	22mm x 109mm x 70mm			

Remote I/O

Digital Input						
DC	Channel	Type	Voltage	Signal Delay (OFF to ON/ ON to OFF)	Power Dissipation	Connector
GT-1138	8	Universal	5 Vdc	0.3ms	35 mA	10 RTB
GT-1238	8	Universal	24 Vdc	0.3ms/ 0.3ms	35 mA	10 RTB
GT-123F	16			0.3ms/ 0.3ms	50 mA	20P Connector
GT-12DF	16			0.3ms/ 0.3ms	50 mA	18 RTB
GT-12FA	32			0.2ms/ 0.2ms	55 mA	40P Connector
GT-121F	16	Sink	24 Vdc	0.3ms	50 mA	20P Connector
GT-122F	16	Source	24 Vdc	0.3ms	50 mA	20P Connector
GT-1258	8	Diagnostics (Short, Open)	24 Vdc	(0) : $I \leq 1.5\text{mA}$ (1) : $I \geq 4.8\text{mA}$	50 mA	18 RTB
GT-1278	8	Sink	24 Vdc/6mA	0.3ms	40 mA	18 RTB
GT-1358	8		24 Vdc	0.3ms	35 mA	18 RTB
GT-1368	16	Source	24 Vdc	0.3ms	35 mA	20P Connector
GT-1428	In (8) / Out (8)	In (Sink) / Out(Source) - Diagnostic	24 Vdc	In: 0.3ms / 0.3ms Out: 0.1ms/ 0.35ms	55 mA	18 RTB
GT-15DF	16	Universal	12 Vdc	0.3ms	50 mA	18 RTB
GT-1658	8	Proximity Sensor	8.2 Vdc	(0) : $I \leq 1.2\text{mA}$ (1) : $I \geq 2.1\text{mA}$	50 mA	18 RTB
AC	Channel	Type	Voltage	Signal Delay (OFF to ON/ ON to OFF)	Power Dissipation	Connector
GT-1804	4	AC Input Terminal	120 Vac	30mS/ 130mS	30 mA	10 RTB
GT-1904	4		240 Vac	30mS/ 140mS	30 mA	10 RTB

Digital Output						
Sink	Channel	Type	Voltage	Signal Delay (OFF to ON/ ON to OFF)	Power Dissipation	Connector
GT-221F	16	Sink	24 Vdc	0.5mS/ 0.5ms	50 mA	20P Connector
GT-223F	16		24 Vdc/0.3A	0.4mS	50 mA	20P Connector
GT-225F	16		24 Vdc	0.3mS/ 0.5ms	50 mA	18 RTB
GT-227F	16		24 Vdc/2.0A	0.4ms	50 mA	18 RTB
GT-22BA	32		24 Vdc/0.3A	0.5ms	65 mA	40P Connector
GT-22DA	32		24 Vdc/0.3A	0.4ms	65 mA	40P Connector
GT-2318	8		24 Vdc	0.3ms/ 0.3ms	45 mA	10 RTB
GT-2338	8		24 Vdc/2.0A	0.4ms	50 mA	10 RTB
GT-2358	8	Multi-Com	24 Vdc/0.5A	0.3ms	50 mA	18 RTB
GT-2378	8		24 Vdc/2.0A	0.4ms	50 mA	18 RTB
GT-2418	8	Sink - Diagnostic	24 Vdc	0.3ms/ 0.3ms	50 mA	18 RTB
GT-2438	8	Sink	24 Vdc/2.0A	0.4ms	50 mA	18 RTB
GT-2618	8		24 Vdc	0.3ms/ 0.3ms	50 mA	10 RTB
Source	Channel	Type	Voltage	Signal Delay (OFF to ON/ ON to OFF)	Power Dissipation	Connector
GT-222F	16	Source	24 Vdc	0.3ms/ 0.3ms	50 mA	20P Connector
GT-224F	16		24 Vdc/0.3A	0.6ms	50 mA	20P Connector
GT-226F	16		24 Vdc	0.3ms/ 0.3ms	50 mA	18 RTB
GT-228F	16		24 Vdc/2.0A	0.9ms	50 mA	18 RTB
GT-22CA	32		24 Vdc/0.3A	0.5ms	65 mA	40P Connector
GT-22EA	32		24 Vdc/0.3A	0.6ms	30 mA	40P Connector
GT-2328	8		24 Vdc	0.3ms/ 0.3ms	40 mA	10 RTB
GT-2348	8		24 Vdc/2.0A	0.9ms	40 mA	10 RTB
GT-2368	8	Multi-Com	24 Vdc/0.5A	0.5ms	50 mA	18 RTB
GT-2428	8	Source - Diagnostic	24 Vdc	0.5ms/ 0.5ms	35 mA	18 RTB
GT-2628	8	Source	24 Vdc	0.3ms/ 0.3ms	45 mA	10 RTB
Relay	Channel	Type	Voltage	Signal Delay (OFF to ON/ ON to OFF)	Power Dissipation	Connector
GT-2734	4	MOS Relay (Solid State)	240 Vac/240 Vdc	0.6ms/ 3ms	80 mA	10 RTB
GT-2738	8			0.5ms/ 2.5ms	130 mA	18 RTB
GT-2744	4	Relay Output (Form A, SPST)	0~32 Vdc/48 Vdc/ 110 Vdc/240 Vac	5ms/ 8 ~ 15ms	35 mA	10 RTB
GT-2764	4	MOS Relay (Solid State)	24 Vac / 24 Vdc	1ms/ 3 ~ 3.5ms	80 mA	10 RTB
GT-2768	8			0.5ms/ 3ms	130 mA	18 RTB
GT-2784	4		110 Vac/110 Vdc	1 ~ 1.5ms/ 3ms	80 mA	10 RTB
GT-2788	8			1ms/ 3.5 ms	130 mA	18 RTB

Remote I/O

Analog Input						
LoadCell	Channel	Type	Range	Resolution	Power Dissipation	Connector
GT-3002	2	Strain Gauge	-150~150 mV	24 Bits	25 mA	18 RTB
GT-3102	2		-150~150mV (0.1g/Kg/Ton)	24 Bits	25 mA	18 RTB
Single Ended	Channel	Type	Range	Resolution	Power Dissipation	Connector
GT-3114	4	Current	0~20, 4~20 mA	12 Bits	25 mA	10 RTB
GT-3154	4			16 Bits	25 mA	10 RTB
GT-3118	8			12 Bits	30 mA	10 RTB
GT-3158	8			16 Bits	30 mA	10 RTB
GT-311F	16			12 Bits	30 mA	20P Connector
GT-315F	16			16 Bits	30 mA	20P Connector
GT-317F	16			12 Bits	200 mA	18 RTB
GT-319F	16			16 Bits	200 mA	18 RTB
Single Ended	Channel	Type	Range	Resolution	Power Dissipation	Connector
GT-3424	4	Voltage	0~10, 0~5, 1~5Vdc	12 Bits	25 mA	10 RTB
GT-3464	4			16 Bits	25 mA	10 RTB
GT-3428	8			12 Bits	30 mA	10 RTB
GT-3468	8			16 Bits	30 mA	10 RTB
GT-342F	16			12 Bits	30 mA	20P Connector
GT-346F	16			16 Bits	30 mA	20P Connector
GT-347F	16			12 Bits	210 mA	18 RTB
GT-349F	16			16 Bits	210 mA	18 RTB
Differential	Channel	Type	Range	Resolution	Power Dissipation	Connector
GT-3914	4	Current	0~20, 4~20, -20~20 mA	12 Bits	30 mA	10 RTB
GT-3934	4			16 Bits	30 mA	10 RTB
GT-3918	8			12 Bits	200 mA	18 RTB
GT-3938	8			16 Bits	200 mA	18 RTB
GT-3924	4	Voltage	0~5, 0~10, -5~5, -10~10 Vdc	12 Bits	30 mA	10 RTB
GT-3944	4			16 Bits	30 mA	10 RTB
GT-3928	8			12 Bits	200 mA	18 RTB
GT-3948	8			16 Bits	200 mA	18 RTB
Temperature	Channel	Type	Sensor Type	Accuracy	Power Dissipation	Connector
GT-3704	4	RTD	PT50, PT100, PT200, PT500, PT1000, JPT50, JPT100, JPT200, JPT500, JPT1000, NI100, NI120, NI200, NI500, NI1000, NI1000LG	±0.1% @25℃	130 mA	10 RTB
GT-3708	8			±0.3% @-40~70℃	130 mA	20P Connector
GT-3744	4	RTD	PT50, PT100, PT200, PT500, PT1000, JPT50, JPT100, JPT200, JPT500, JPT1000, NI100, NI120, NI200, NI500, NI1000, NI1000LG, Cu10, Cu100	±0.3% @25℃ ±0.5% @-40~70℃	120 mA	18 RTB
GT-3758	8	NTC	NTC 10K	±1℃ @ 25℃ ±2℃ @ -40℃~70℃	105 mA	18 RTB
GT-3708	8	RTD	PT50, PT100, PT200, PT500, PT1000, JPT50, JPT100, JPT200, JPT500, JPT1000, NI100, NI120, NI200, NI500, NI1000, NI1000LG	±0.1% @25℃ ±0.3% @-40~70℃	130 mA	20P Connector
GT-3788	8	RTD	PT50, PT100, PT200, PT500, PT1000, JPT50, JPT100, JPT200, JPT500, JPT1000, NI100, NI120, NI200, NI500, NI1000, NI1000LG, Cu10, Cu100	±0.3% @25℃ ±0.5% @-40~70℃	105 mA	18 RTB
GT-3888	8	TC	Type K/J/T/B/R/S/E/N/L/U/C/D, 10uV/1uV/2uV	±0.3% @25℃ ±0.5% @-40~70℃	140 mA	18 RTB
GT-3804	4	T.C. (Thermocouple)	Type K/J/T/B/R/S/E/N/L/U/C/D, 10uV/1uV/2uV	±0.1% @25℃	120 mA	10 RTB
GT-3808	8			±0.3% @-40~70℃	120 mA	20P Connector
Temp. Control	Channel	Type	Sensor Type	Accuracy	Power Dissipation	Connector
GT-3714	4	Temperature Controller (RTD)	PT 50, PT 100, JPT 100, NI 100, NI 120, CU 10	±0.1% @25℃	50 mA	20P Connector
GT-3734	4				50 mA	20P Connector
GT-3814	4	Temperature Controller (Thermocouple)	Type K/J/T/B/R/S/E/N/L/U/C/D	±0.1% @25℃ ±0.3% @-20~50℃	50 mA	20P Connector
GT-3834	4				50 mA	20P Connector
AC Measurement	Channel	Type	Range	Resolution	Power Dissipation	Connector
GT-3901	1	AC Measurement	VLN = 288VAC, VLL = 500VAC	24 Bits	125 mA	10 RTB
GT-3911	1		VLN = 288VAC, VLL = 500VAC / 5A	24 Bits	110 mA	10 RTB
Combi - AI/AO	Channel	Type	Range	Resolution	Power Dissipation	Connector
GT-3C74	4	Voltage	Voltage Input, 0~10Vdc, 0~5Vdc, 1~5Vdc, Voltage Output, 0~10Vdc	12 Bits	30 mA	18 RTB
GT-3C78	8			12 Bits	30 mA	18 RTB
GT-3C94	4			12 Bits	30 mA	18 RTB
GT-3C98	8			16 Bits	30 mA	18 RTB

* UL Listed products (except GT-3714, GT-3734, GT-3814, GT-3834, GT-3901)

Remote I/O

Analog Output						
Single Ended	Channel	Type	Range	Resolution	Power Dissipation	Connector
GT-4114	4	Current	0~20 mA	12 Bits	30 mA	10 RTB
GT-4154	4			16 Bits	30 mA	10 RTB
GT-4118	8			12 Bits	30 mA	10 RTB
GT-4158	8			16 Bits	30 mA	10 RTB
GT-4214	4		4~20 mA	12 Bits	30 mA	10 RTB
GT-4254	4			16 Bits	30 mA	10 RTB
GT-4218	8			12 Bits	30 mA	10 RTB
GT-4258	8			16 Bits	30 mA	10 RTB
Single Ended	Channel	Load Resistance	Range	Resolution	Power Dissipation	Connector
GT-4314	4	550 Ω	4~20mA	12 Bits	30 mA	18 RTB
GT-4334	4	750 Ω		16 Bits	30 mA	18 RTB
GT-4354	4	550 Ω		16 Bits	30 mA	18 RTB
GT-4374	4	750 Ω		16 Bits	30 mA	18 RTB
Single Ended	Channel	Type	Range	Resolution	Power Dissipation	Connector
GT-4424	4	Voltage	0~10 Vdc	12 Bits	30 mA	10 RTB
GT-4464	4			16 Bits	30 mA	10 RTB
GT-4428	8			12 Bits	30 mA	10 RTB
GT-4468	8			16 Bits	30 mA	10 RTB
GT-442F	16			12 Bits	30 mA	20P Connector
GT-446F	16			16 Bits	30 mA	20P Connector
GT-447F	16			12 Bits	30 mA	18 RTB
GT-449F	16			16 Bits	30 mA	18 RTB
GT-4524	4		-10~10 Vdc	12 Bits	30 mA	10 RTB
GT-4564	4			16 Bits	30 mA	10 RTB

Special Module						
Encoder	Channel	Type	Voltage	Frequency (Encoder / Counting)	Power Dissipation	Connector
GT-5102	2	High Speed Counter	5 Vdc	0~750 kHz / 0~300 kHz	70 mA	10 RTB
GT-5112	2		24 Vdc	0~750 kHz / 0~300 kHz	65 mA	10 RTB
GT-5114	4		24 Vdc	0~750 kHz / 0~100 kHz	70 mA	10 RTB
GT-5122	2		5~24 Vdc	0~750kHz / 0~500 kHz	120 mA	18 RTB
GT-5132	2		24 Vdc	0~750 kHz / 0~300 kHz	65 mA	10 RTB
GT-5142	2		5~24 Vdc	0~750 kHz / 0~500 kHz (Gate Function Mode)	120 mA	18 RTB
Serial Interface	Channel	Type	Voltage	Signal Delay	Power Dissipation	Connector
GT-5211	1	RS-232, RTS/CTS	-18 ~ 18 V	TxD, RxD, Full Duplex	85 mA	10 RTB
GT-5212	2	RS-232			85 mA	10 RTB
GT-5221	1	RS-422	-		TxD, RxD, Half Duplex	85 mA
GT-5231	1	RS-485		85 mA		10 RTB
GT-5232	2	RS-485		85 mA		10 RTB
GT-5352	2	Synchronous	-	-	60 mA	10 RTB
Pulse	Channel	Type	Voltage	Frequency	Power Dissipation	Connector
GT-5422	2	PWM, Push-pull	24 Vdc	1~5 kHz	75 mA	18 RTB
GT-5424	4		24 Vdc		80 mA	18 RTB
GT-5442	2		24 Vdc		75 mA	18 RTB
GT-5444	4		24 Vdc		75 mA	18 RTB
GT-5642	2	Pulse Output, Push-pull	24 Vdc	1~300 kHz	75 mA	18 RTB
GT-5652	2	Differential Output	5 Vdc	1~500 kHz	75 mA	18 RTB
Stepper	Channel	Type	Voltage	Mode	Power Dissipation	Connector
GT-5521	1	2-Phase Bipolar Motor (Max. 16 microstepping)	24 Vdc	Instant Command, Position Table, Position (absolute/relative), Set Point Change, etc.	100 mA	10 RTB
HART	Channel	Type	Input Range	Resolution	Power Dissipation	Connector
GT-5914	4	HART Revision 5	4 ~20 mA	16 Bits	30 mA	18 RTB
IO Link	Channel	Type	Voltage	Transmission rate	Power Dissipation	Connector
GT-5904	2	IO Link V1.1 Master	24 Vdc	4.8 Kbps(COM1) , 38.4 Kbps(COM2) 230.4 Kbps(COM3)	85 mA	18 RTB


Remote I/O

Power Module				
Power	Type	Voltage	Power Dissipation	Connector
GT-7408	Shield	24 Vdc	30 mA	10 RTB
GT-7508	Common for 0 Vdc		30 mA	10 RTB
GT-7511	Expansion		20 mA	10 RTB
GT-7518	Common for 24 Vdc		30 mA	10 RTB
GT-7588	Common for 0Vdc, 24 Vdc		30 mA	10 RTB
GT-7641	Field Power Distribution		30 mA	10 RTB
Filter	Type	Voltage	Power Dissipation	Connector
GT-7151	None ID Type	24 Vdc	Max. 120mA @ 5Vdc	10 RTB
GT-7851	ID Type	24 Vdc	Max. 120mA @ 5Vdc	10 RTB

Dimension

Network Adapter

Model : GN-9212, GN-9222, GN-9251, GN-9261, GN-9273, GN-9231, GN-9284, GN-9285, GN-9386, GN-9287, GN-9587, GN-9289, GN-9371, GN-9372, GN-9373, GN-9481, GN-9482, GN-9483

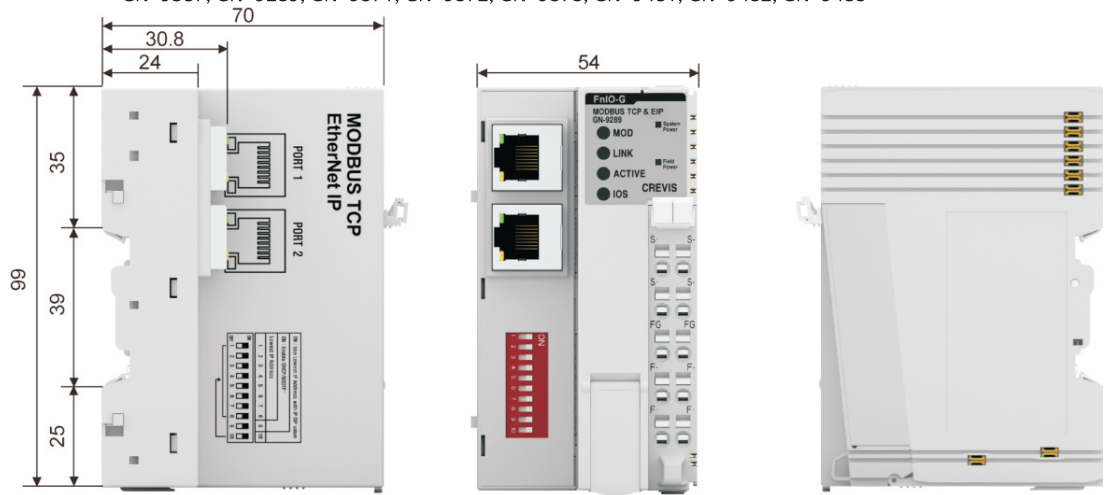


Model : GL-9971, GL-9089, GL-9087, GL-9084, GL-9073, GL-9086




I/O


10-Hole Removable Terminal Block (10 RTB)

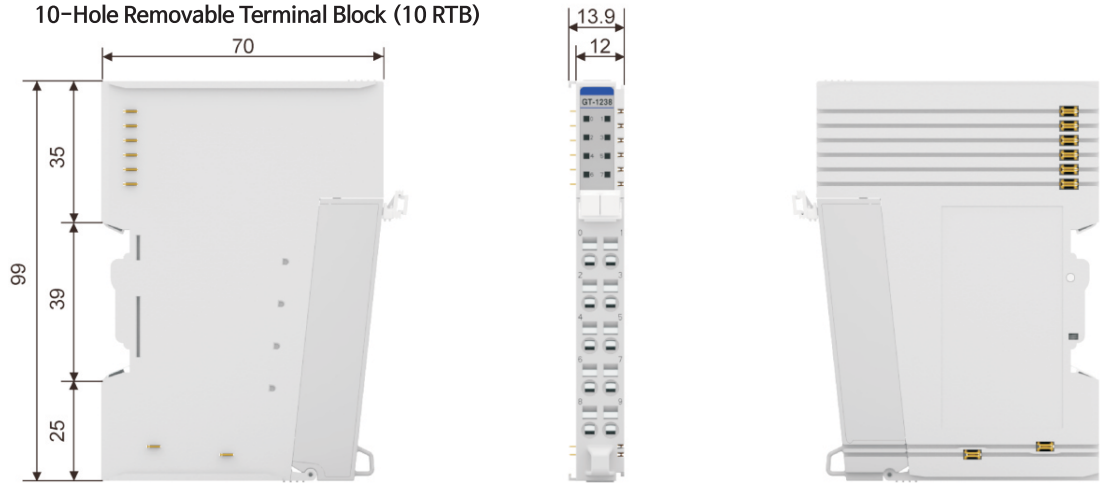


18-Hole Removable Terminal Block (18 RTB)

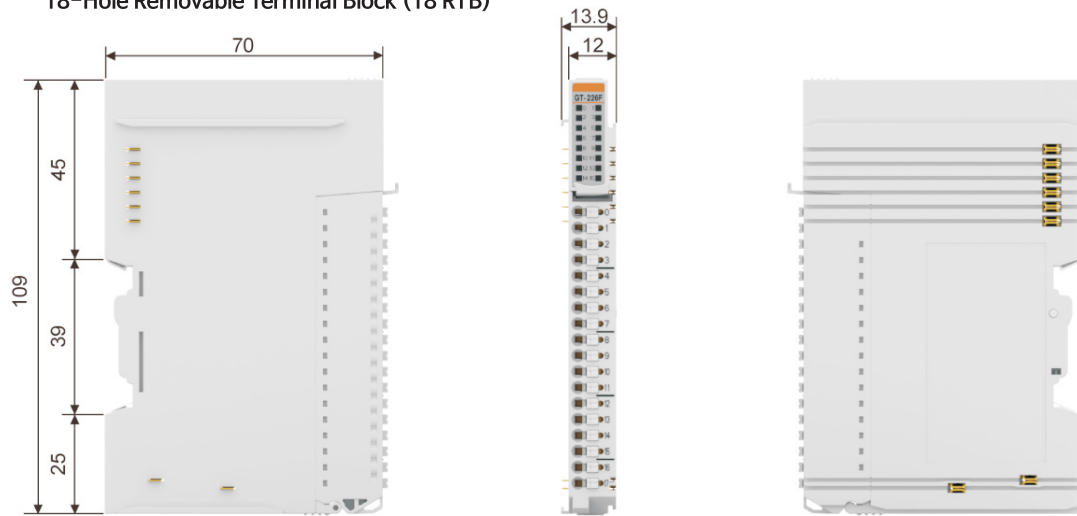


20-PIN Connector

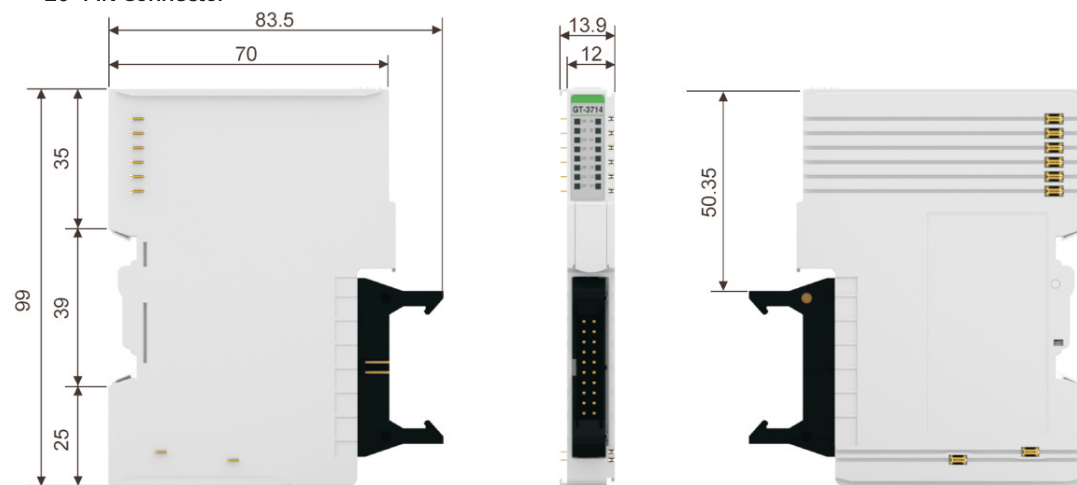

40-PIN Connector

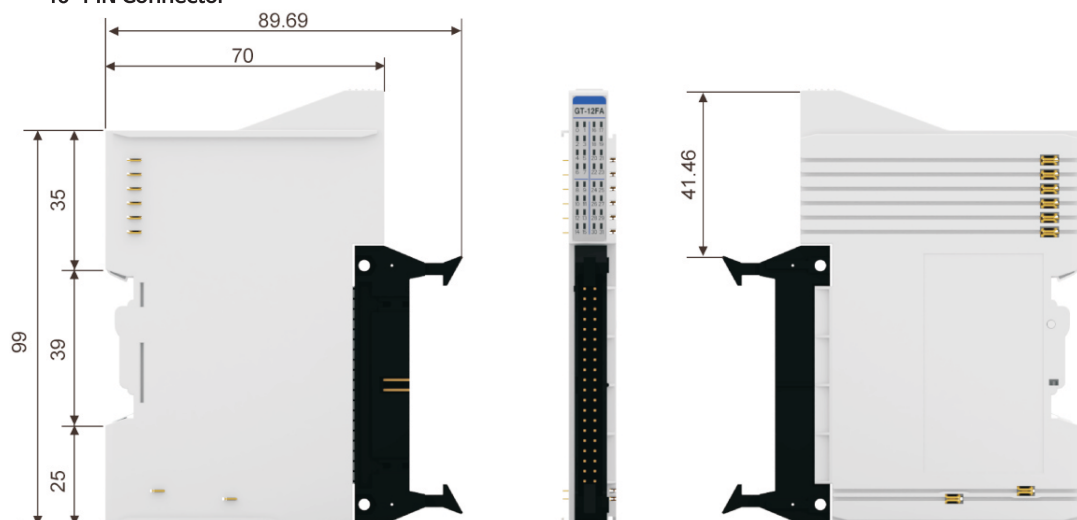

Documentation offered by your distributor



CREVIS. Co.,Ltd.

www.crevis.co.kr

경기도 용인시 기흥구 기곡로 29-4 (17099)
대표번호 : 031-899-4599
제어기 영업 : 031-899-4502, 4515
카메라 영업 : 031-899-4503, 4507
팩스번호 : 031-899-4509
E-mail : crevis@crevis.co.kr

29-4, Gigokro, Giheunggu, Yonginsi, 17099, Korea
Tel : +82-31-899-4599
Controller sales : +82-31-899-4502, 4515
Camera sales : +82-31-899-4503, 4507
Fax : +82-31-899-4509
E-mail : crevis@crevis.co.kr